


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz): 0.800-2.200
 IMPEDANCE (NOMINAL): 50 OHMS
 VSWR: INPUT: 1.15:1 TYP/1.25:1 MAX
 OUTPUT: 1.10:1 TYP/1.20:1 MAX
 INSERTION LOSS (dB): 0.3 TYP/0.4 MAX
 AMPLITUDE BALANCE (MAX): 0.1 dB
 PHASE BALANCE (MAX): 2 DEGREES
 ISOLATION (dB): 27 TYP/22 MIN
 RF POWER (TOTAL MAX): 20 WATTS INPUT WITH LOAD
 VSWR 1.2:1 OR BETTER

MECHANICAL SPECIFICATIONS

CONNECTORS: SMA-FEMALE, STAINLESS STEEL, PASSIVATE
 CONNECTOR PINS: BERYLLIUM COPPER, GOLD PLATE
 HOUSING: ALUMINUM, YELLOW IRIDITE
 INSULATORS: PTFE, VIRGIN ELECTRICAL GRADE
 TEMPERATURE: -55°C TO +85°C

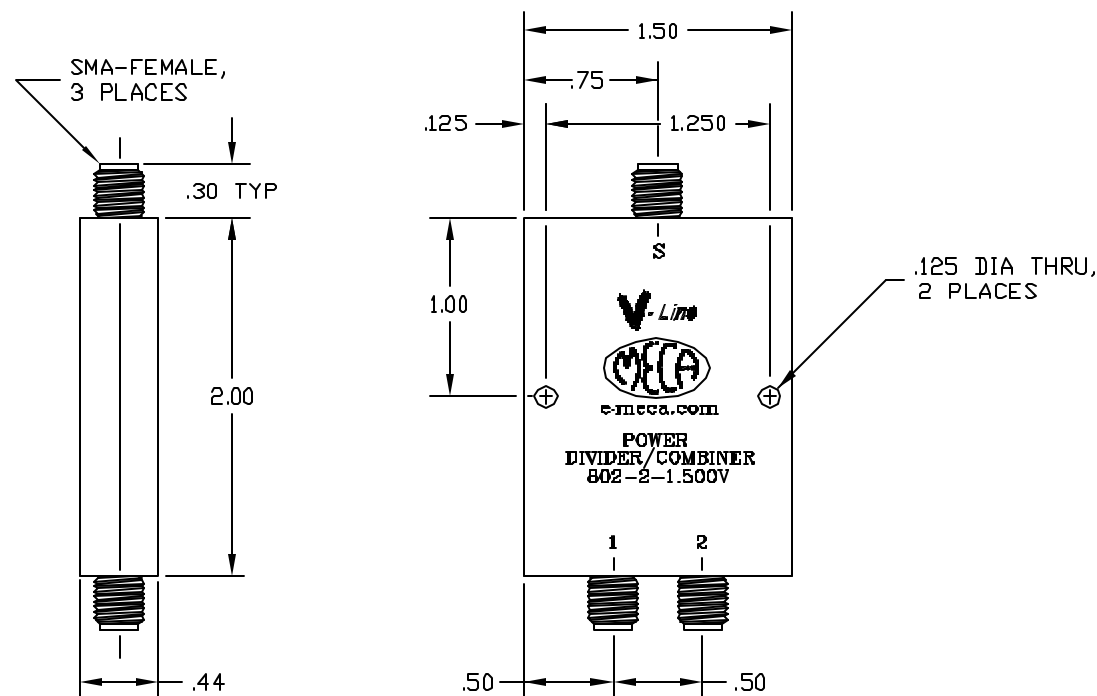

				MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		 ELECTRONICS, INC. DENVILLE, NEW JERSEY e-meca.com	
				FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ± .02 3 PLACES: ± .010 ANGLES: ± ---			
				DRAWN: RWA	DATE: 10/10/01	TIR:		V-Line 2-WAY, IN-PHASE (0 DEGREE), POWER DIVIDER/COMBINER, SMA-FEMALE	
				APPROVED: MJD	DATE: 10/10/01	SCALE: NTS	SIZE A		
LTR	DESCRIPTION	DATE	APP					CODE IDENT. NO. 22424	DRAWING NO. 802-2-1.500V